



**TRUE FOOD SERVICE EQUIPMENT, INC.**

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366  
(636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: \_\_\_\_\_

AIA #

Location: \_\_\_\_\_

SIS #

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model #: \_\_\_\_\_

**Back Bar Storage Coolers**



**TBB-3**

**Back Bar Storage Coolers**

- TBB-2**,  **TBB-3**,  **TBB-4**
- &  TBB-4PT**

*True's oversized and balanced refrigeration system with extra large evaporator performs in the hottest, most humid climates. Excellent for all tropical beach bars.*

**SPECIFICATIONS / FEATURES**

**CABINET CONSTRUCTION:**

- Durable, non-peel or chip black laminated vinyl exterior. All stainless steel top. (All models available in stainless steel exterior)
- Versatile flat top slides easily under bar or can be used as a counter/storage space.
- Interior - 300 series stainless steel floor with 1/2" lip and heavy galvanized steel walls. Construction of liner in accordance with NSF standards.
- Bright fluorescent interior lighting for excellent visibility.

**DOORS:**

- Positive seal doors. Door gaskets of one piece construction, and removable for ease in cleaning.
- Doors include 12" long horizontal recessed handle with sheetmetal interlock. Handles foamed-in-place to insure permanent attachment.
- Door locks standard.

**INSULATION:**

- Entire cabinet structure and doors insulated using foamed-in-place CFC free polyurethane foam.

**REFRIGERATION SYSTEM:**

- Refrigeration system factory balanced using CFC free 134A refrigerant.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 33° to 38°F interior cabinet temperature.
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.
- Air vents on side to maximize flow of fresh air through condenser.

**ELECTRICAL CHARACTERISTICS:**

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.
- A sole use circuit is required.



115/60/1  
NEMA-5-15R

*Remote cabinets available 14% off list (condensing units supplied by others). Consult factory technical service dept. for BTU information.*

Specifications subject to change without notice.


Printed in U.S.A.




**APPROVALS:**

10/03


Exceptions:

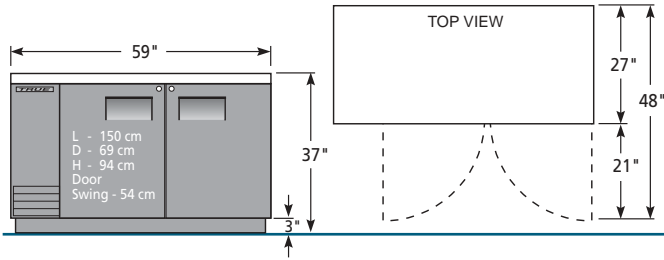


**TBB-2**

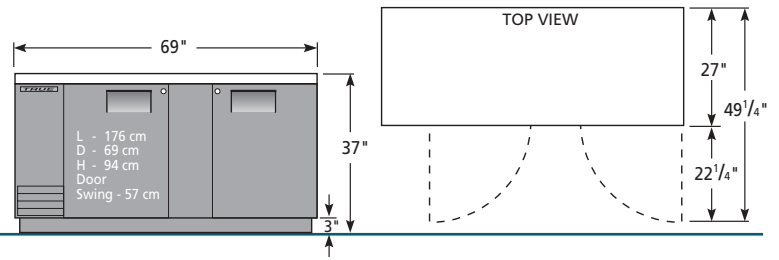


**TBB-3**

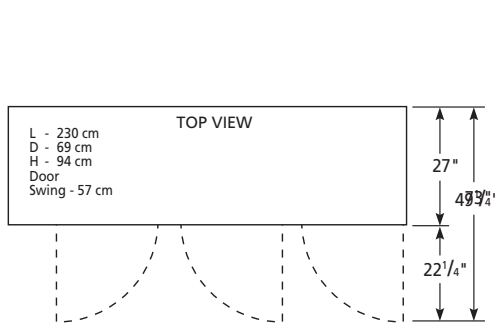

**TBB-4**

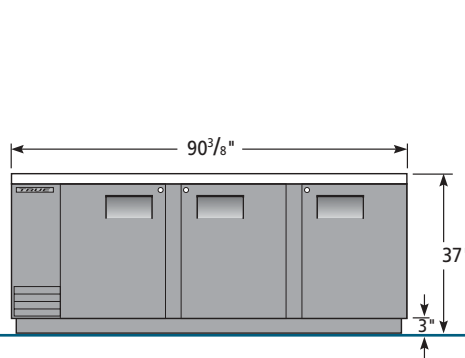

**TBB-4/TBB-4PT**

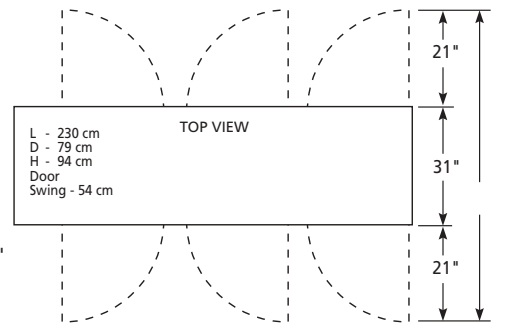

**TBB-4PT**

### Rough-In Data

Model	Doors	Shelves	Half Barrels	12 oz. cans	Dimensions (inches)			HP	Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
					L	D	H							
TBB-2	2	4	2	134 6-packs	59	27	37	1/3	115	1	8.5	5-15	7	320
TBB-3	2	4	3	161 6-packs	69	27	37	1/3	115	1	8.5	5-15	7	365
TBB-4	3	6	4	209 6-packs	90 3/8	27	37	1/3	115	1	8.5	5-15	7	460
<i>Pass-thru model</i>														
TBB-4PT	6	6	4	193 6-packs	90 3/8	31	37	1/2	115	1	8.8	5-15	7	565

All standard models available in glass door, stainless steel, and stainless steel glass door models. Pass-thru model available in stainless steel.

Specifications subject to change without notice.

### Standard Features

- Oversized environmentally friendly (134A) refrigeration system allows quick pull down of hot 90°F products to cold 33°F to 38°F temperatures.
- Stainless steel top with aluminum back.
- Durable, black laminated vinyl exterior.
- Interior - 300 series stainless steel floor with 1/2" lip & heavy galvanized steel walls.
- Versatile flat top slides easily under bar or can be used as a counter/storage space.
- Door locks standard.
- Two 10 mil thick, heavy duty, black vinyl coated wire shelves per door.
- Positive seal doors.
- Recessed door handles.
- Bright fluorescent interior lighting.
- Foamed-in-place high density polyurethane insulation (CFC free).
- Air vents on side of cooler.
- Pass-thru model designed for convenient rear-loading and front access for serving.
- Slide out compressor can be serviced easily and accessed by a single repairman.
- Self-contained system.
- 1 year parts & labor warranty (USA).
- 5 year compressor warranty (USA).

### Optional Accessories

- Optional stainless steel or seismic legs.
- 2 1/2" or 4" diameter castors.
- Additional shelves (left side).
- Optional wine racks, beer or wine organizers.
- Remote cabinets available, consult factory.

	Model	Front	Right	Plan	3D
	TBB-2	TFJY04E	TFJY04S	TFJY04P	TFJY043
	TBB-3	TFJY03E	TFJY03S	TFJY03P	TFJY033
	TBB-4	TFJY02E	TFJY03S	TFJY02P	TFJY023
	TBB-4PT				